

Received May 4, 2020, accepted May 19, 2020, date of publication May 21, 2020, date of current version June 4, 2020.

Digital Object Identifier 10.1109/ACCESS.2020.2996426

# GaN-Based Versatile Waveform Generator for Biomedical Applications of Electroporation

HÉCTOR SARNAGO<sup>1</sup>, (Senior Member, IEEE), JOSÉ M. BURDÍO<sup>1</sup>, (Senior Member, IEEE), TOMÁS GARCÍA-SÁNCHEZ<sup>2</sup>, LLUIS M. MIR<sup>3</sup>, IGNACIO ÁLVAREZ-GARIBURO<sup>1</sup>, AND OSCAR LUCÍA<sup>1</sup>, (Senior Member, IEEE)

<sup>1</sup>Department of Electronics Engineering and Communications, Aragon Institute for Engineering Research (I3A), University of Zaragoza, 50.018 Zaragoza, Spain

<sup>2</sup>Department of Information and Communication Technologies, Universitat Pompeu Fabra, 16770 Barcelona, Spain

<sup>3</sup>Laboratory of Vectorology and Anticancer Therapies, CNRS, 27051 Paris, France

Corresponding author: Oscar Lucía (olucia@unizar.es)

This work was supported in part by the Spanish Ministerio de economía y competitividad (MINECO) and Agencia Española de Investigación (AEI) under Project TEC2016-78358-R, in part by the Spanish Ministerio de Ciencia e Innovación (MICINN) under Project PIN2019, in part by the EU through the Fondo Europeo de Desarrollo Regional (FEDER) Program, in part by the Diputación General de Aragón-Fondo Social Europeo (DGA-FSE), and in part by the DGA under Project LMP106-18.

**ABSTRACT** Biomedical applications often require high-performance power supplies for diagnosis and treatment systems. In particular, modern electroporation techniques for cancer treatment require high-voltage generators with versatile waveform generation. In this context, sinusoidal waveform generation has been recently identified as beneficial for electrochemotherapy cancer treatments. This paper proposes the design of a high-voltage high-frequency arbitrary waveform generator taking advantage of Gallium Nitride (GaN) devices. The proposed converter has been designed and implemented, achieving a 1-MHz 2000-V output voltage. It has been electrically tested and applied to electrochemotherapy treatments in mice, demonstrating the feasibility of this proposal.

**INDEX TERMS** Electroporation, magnetic components, arbitrary waveform generators, capacitors, wide bandgap semiconductor, cancer treatment.

## I. INTRODUCTION


High-voltage generators are required in a wide range of biomedical applications from diagnosis to treatment systems. Among these, electroporation [1], [2] is a promising cancer treatment technique which requires the application of a high-intensity electric field pulses to induce either reversible or irreversible processes (FIGURE 1) [3]. Electroporation is based on applying an intense electric field to induce biological changes in the desired tissue. If the electric field is below the reversibility threshold ( $E_{rev}$ , typically 500-1000 V), the cell recovers its initial state after the electroporation process. This process is called reversible electroporation (RE) and it is commonly used to improve drug absorption, for instance in electrochemotherapy treatments [4]–[6]. However, if the applied electric field is beyond that level, the process is irreversible, i.e. irreversible electroporation (IRE), and the process leads to the cell death by a combination of necrosis and apoptosis processes. This process is used for selective tissue ablation, always avoiding

exceeding the thermal limit ( $E_{thermal}$ ) that would lead to thermal ablation. IRE ablation has significant advantages [1], [7]–[10] including faster recovery and the avoidance of uneven treatments typical of thermal ablations made using radiofrequency or microwave technology.

Currently, electroporation treatments rely on the use of square-wave generators applying the waveforms described in FIGURE 2 (a) to (d), which include capacitor discharge circuits, and constant voltage circuits, both with unipolar or bipolar alternatives in order to avoid undesired effects of bias voltage [11]. However, recent studies have demonstrated the effectivity of applying high-voltage sinusoidal waveforms [12], [13] with lower harmonic content. These treatments require, however, new power electronics designs for enabling high-voltage sinusoidal waveform generation.

In the past, several attempts have been made providing versatile signal generators but with limited voltage/current amplitudes [14] or operating frequencies [15], [16], not fulfilling the requirements of electroporation applications. In [17], an accurate Josephson arbitrary generator is proposed, but limited to 1 V and 1 kHz. One of the few large-signal generators is detailed in [18]. However, it is

The associate editor coordinating the review of this manuscript and approving it for publication was Rocco Giofrè.

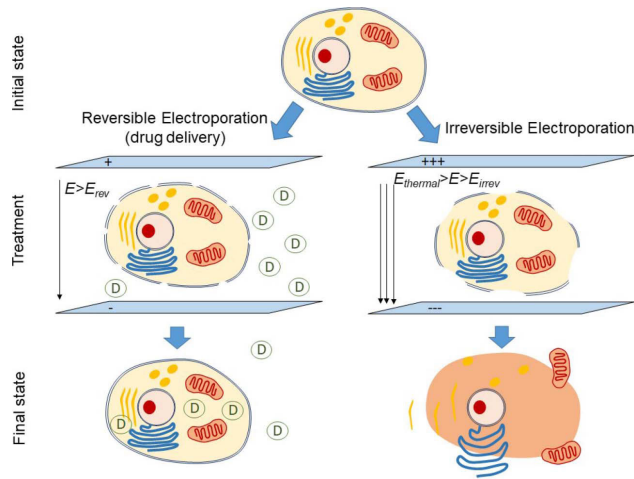

**FIGURE 1. Cell electroporation: reversible (a) and irreversible (b) processes.**

limited to sinusoidal waveforms and requires adapting the resonant tank, including frequency resolution and dynamic performance limitations.

The aim of this paper is to provide a versatile large-signal high-frequency arbitrary waveform generator taking advantage of the new wide bandgap (WBG) devices [19]–[22] and a multi-level topology [23]–[25]. Multi-level converters have been studied and applied in the past to related applications such as pulsed electric fields for water disinfection [26]–[30], among others. In this paper, GaN devices will be used to enable a fast-operation and high-performance high-voltage generator implementation achieving 2 kV pp output voltage, 10 A output current, and operating frequencies exceeding 1 MHz [31]. By using a high number of low-voltage levels, it will be possible to generate arbitrary waveforms with low distortion. The proposed generator is applied to a novel electrochemotherapy (ECT) treatment using

sinusoidal waveform, where the electric field created by the proposed generator is applied to the tumours to increase their permeability to a chemotherapeutic agent (bleomycin). Thus, a more effective treatment is obtained with less side effects.


The remainder of this paper is organized as follows. Section II details the proposed power converter, including the proposed topology and modulation strategy. Section III details the main implementation and experimental results, including electrical test and results during in-vivo mice ECT experiment. Finally, the conclusions of this paper are drawn in Section IV.

## II. PROPOSED POWER CONVERTER

In order to achieve a versatile high-voltage waveform generator, an isolated multi-level topology is proposed (FIGURE 3). It is composed of  $n$  levels operating at  $V_{bus}$  voltage, being possible to use low voltage devices in its implementation. Each sub-level features an isolated bus plus a super capacitor bank in order to be able to supply high pulsed current required for the electroporation applications. The output block is composed of a full-bridge topology, being able to supply bipolar output voltage. It is important to note that, this isolated structure provides inherent voltage balance between all the sub-levels.

The amplitude resolution of the proposed converter is defined by  $V_{bus}$ , whereas the maximum output voltage is, consequently,  $nV_{bus}$ . In order to improve the amplitude resolution and reduce the harmonic content, sinusoidal pulse-width modulation is applied during the level transitions (FIGURE 4). By doing so, high quality output signals can be obtained with a reduced number of required levels.

The temporal resolution of the proposed converter will depend on the switching frequency of the power devices. The higher the switching frequency, the lower the harmonic distortion in the output signal. For this reason, switching

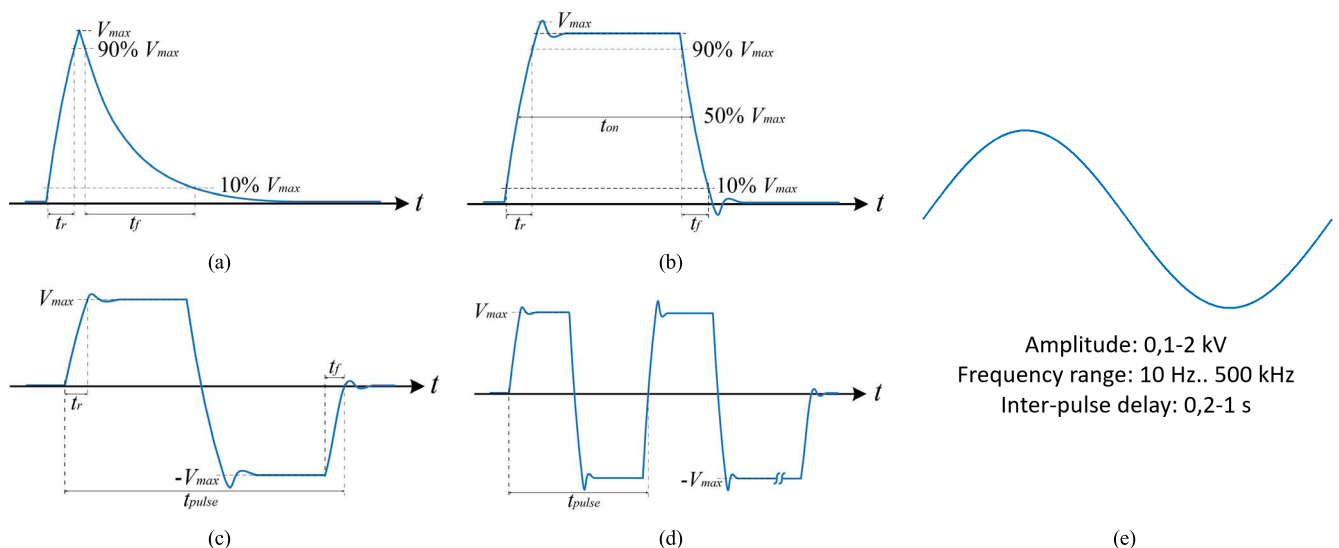

Amplitude: 0,1-2 kV  
Frequency range: 10 Hz.. 500 kHz  
Inter-pulse delay: 0,2-1 s

**FIGURE 2. Output voltage waveforms applied during electroporation treatments: (a) capacitor discharge, (b) unipolar square-wave, (c) bipolar square-wave, (d) bipolar square-wave pulse train, and (e) recently proposed sinusoidal waveform.**

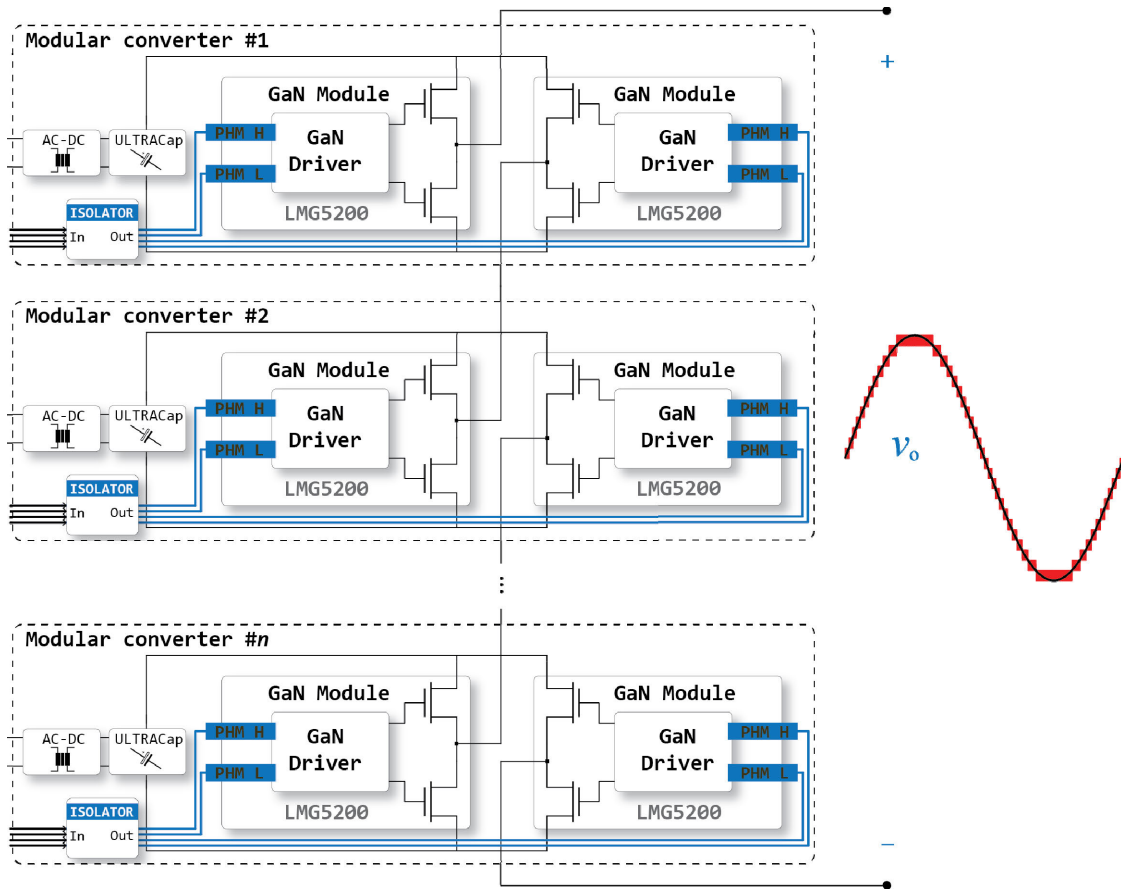


FIGURE 3. Proposed isolated multilevel inverter for versatile high-voltage waveform generation.

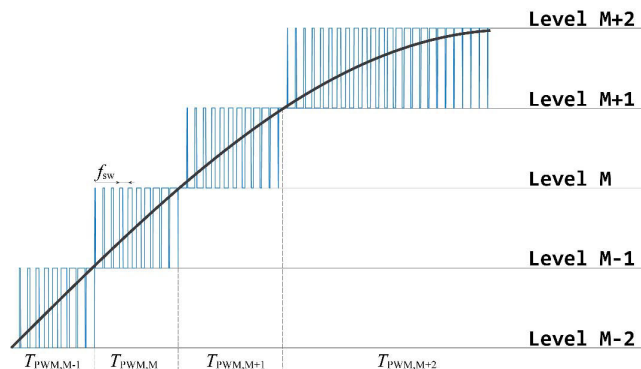


FIGURE 4. Total harmonic distortion of the output voltage as a function of the output amplitude and output sinusoidal waveform frequency.

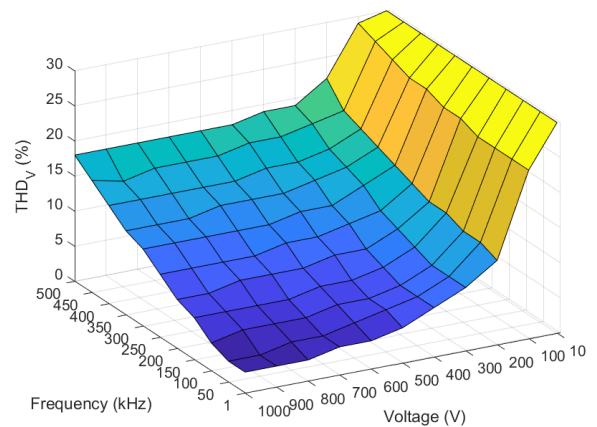


FIGURE 5. Proposed sinusoidal pulse width modulation (SPWM).

frequency will be maximized by using WBG devices in its implementation. Moreover, in order to balance power loss between the different sub-levels, their activation is sequentially alternated during each period of the output signal.

With these useful characteristics, any arbitrary waveform with the voltage/current and frequency limits can be generated, including square, sinusoidal or pulsed-shaped waveforms, or complex modulations for advanced electroporation techniques. It can be also applied to other industrial areas such as communications or audio for versatile and efficient power generation.

FIGURE 5 details an analysis on the influence of the output voltage amplitude and the sinusoidal output voltage frequency in the output voltage total harmonic distortion (THD<sub>v</sub>) of the proposed converter. In this image, it can be seen that the THD<sub>v</sub> increases linearly with the required frequency. Thus, the proposed GaN based implementation will enable operation at lower THD<sub>v</sub> for a wider range of operating points. For the considered 1-MHz design, THD<sub>v</sub> lower than 20% is obtained up to 500 kHz for the maximum output voltage, i.e. 2 kV pp. The influence of the required

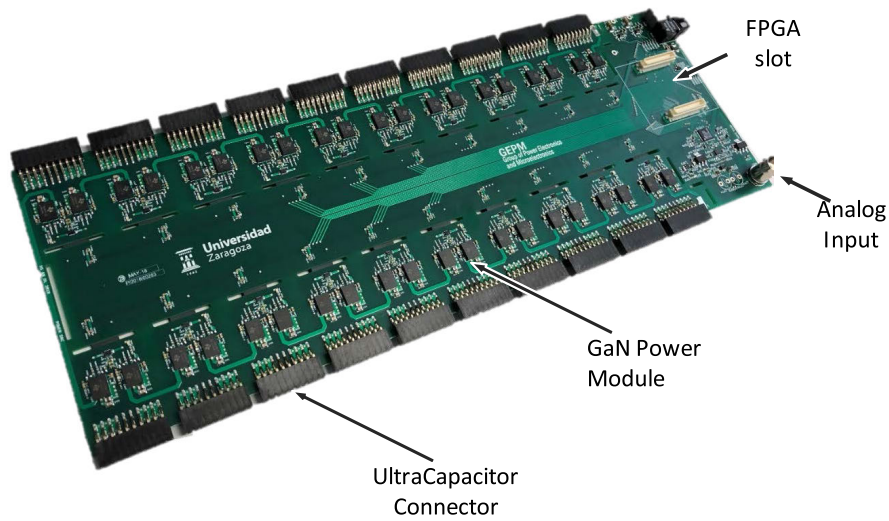


FIGURE 6. Experimental prototype.


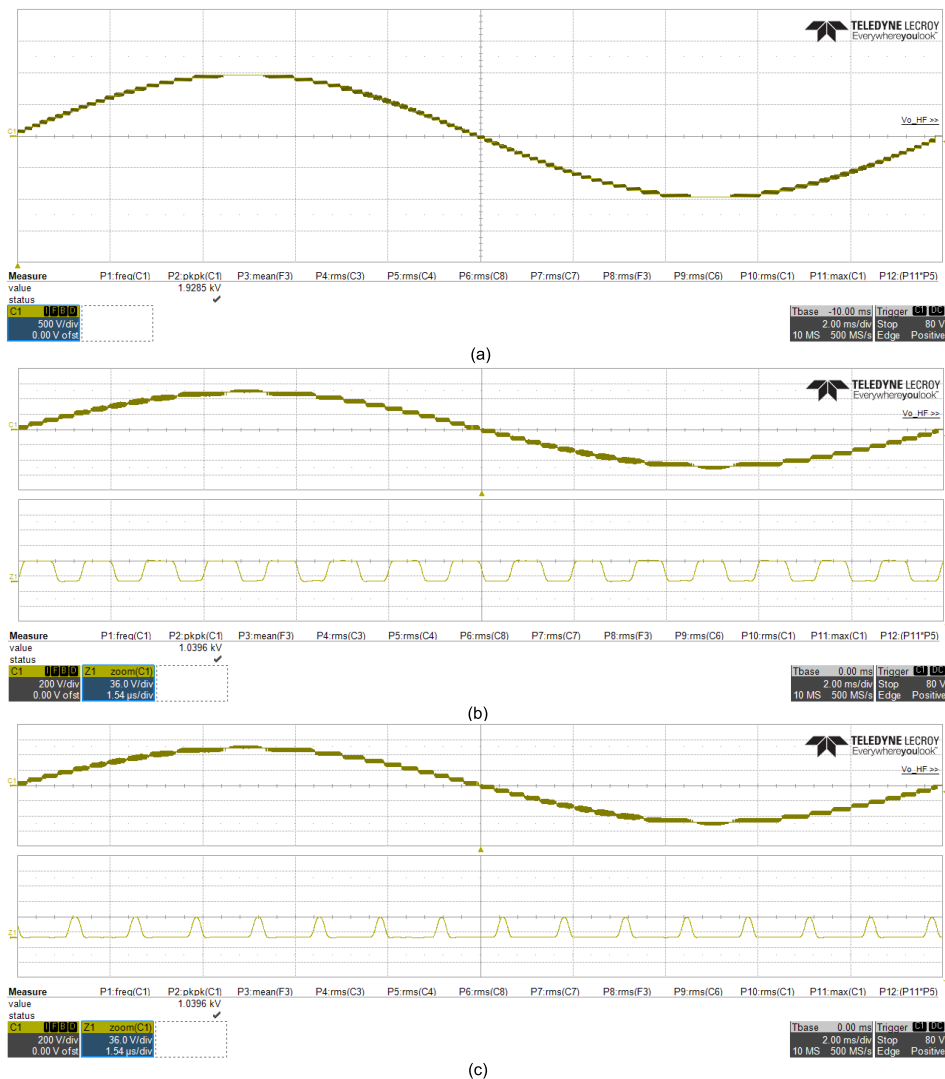


FIGURE 7. Experimental results: 50-Hz 2-kVpp output voltage (a) and detailed views of PWM modulation (b,c).

output voltage can also be analyzed, being the  $THD_V$  severely compromised when the required output voltage is close to the bus voltage of each level. Consequently, designs

where the converter needs to operate in a wide range of output voltages will require a higher number of converter levels in order to ensure proper  $THD_V$ . For the proposed design,

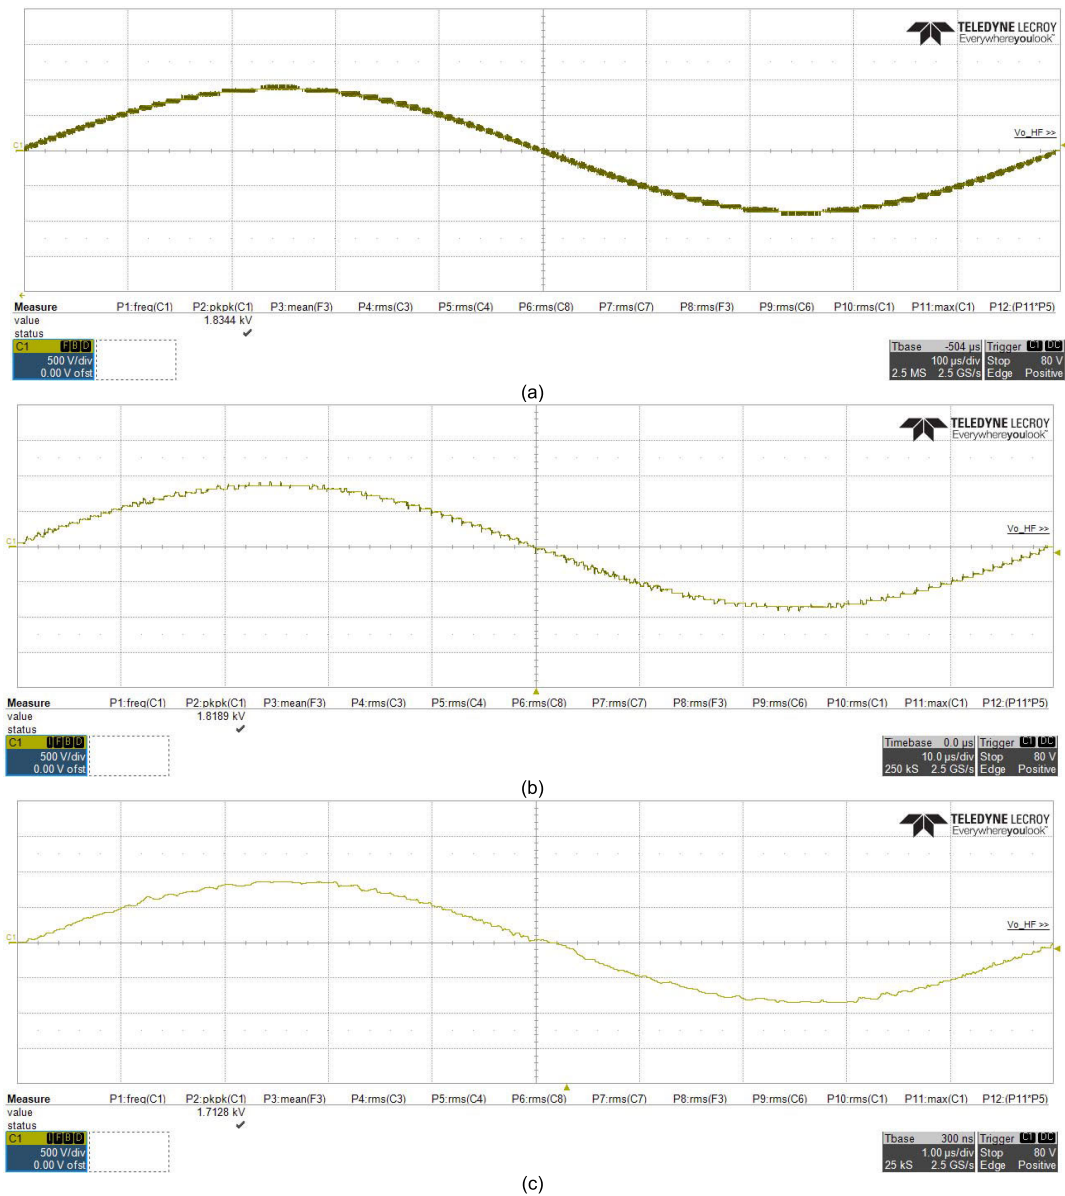

**FIGURE 8. Experimental results: High-voltage and high-frequency operation with 1 kHz (a), 10 kHz (b), and 100 kHz (c) output voltage waveforms.**

20 levels are considered, achieving THD<sub>V</sub> lower than 20% in the 20%-100% output voltage range.

### III. IMPLEMENTATION AND EXPERIMENTAL RESULTS

In order to test the feasibility of the proposed converter, an experimental prototype has been designed and built, which will be later used for clinical application of the new electroporation treatment. For the present study, the generator maximum ratings were fixed to sinusoidal waveforms up to 2 kV pp and 10 A to be provided in a wide range of frequencies from several Hz to hundreds of kHz. To meet these requirements, the proposed generator has been implemented featuring 20 sub-levels operating at a configurable bus voltage up to 60 V. As a result, a maximum 2400 V pp with a minimum resolution of 60 V is achieved. In order to achieve a good temporal resolution, 80-V LM5200 GaN

devices from Texas Instruments have been selected. These devices provide on-resistance suitable for the application and fast switching capabilities, enabling high-frequency operation. Besides, these devices include the driving circuitry, providing a compact implementation, which is a key feature considering the high number of sub-levels. These devices allows providing at least 10-A worst case output current. Considering the frequency requirements of the application, 1 MHz switching frequency plus sinusoidal pulse density modulation has been considered in this design. FIGURE 6 shows the experimental prototype, including GaN devices and sockets for FPGA and capacitor bank connection.

FIGURE 7 shows representative results of the correct operation of the proposed converter. In figure, 50-Hz 2-kVpp output voltage waveform is synthesized, showing a detail of the PWM modulation applied to improve THD.

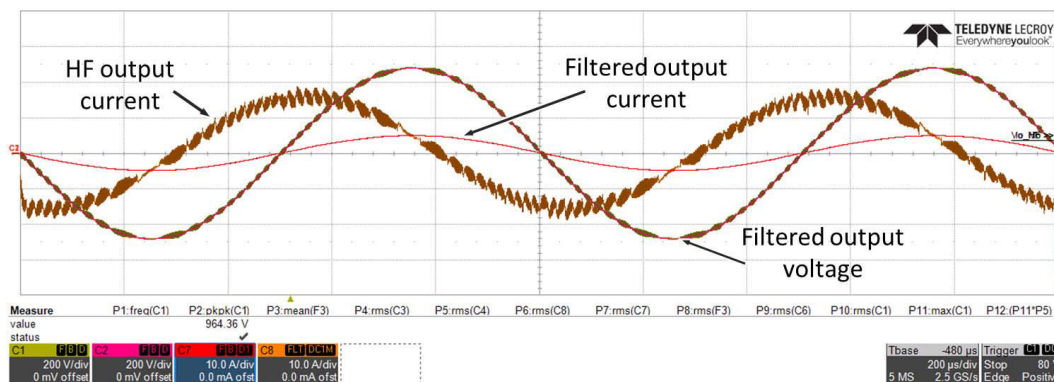


FIGURE 9. Experimental results: operation example with capacitive load.

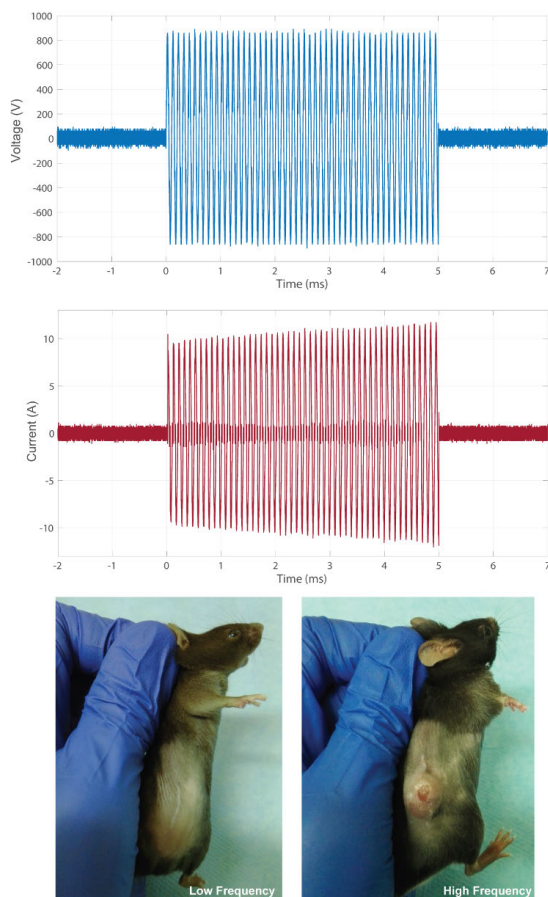


FIGURE 10. Experimental ECT results: applied voltage and current at 10 kHz before applying chemotherapy during the ECT treatment (a) and results of the application of low-frequency (10 kHz) and high-frequency (250 kHz) sinusoidal waveform in the ECT treatment (b).

After the correct converter operation is demonstrated, FIGURE 8 shows several examples of high-frequency operation synthesizing sinusoidal output voltage waveforms with frequency ranging from 1 kHz up to 100 kHz, taking advantage of the 1-MHz operation of the implemented GaN devices. Finally, FIGURE 9 shows an example of the converter operation with capacitive load. This experimental results proves the ability of the converter to operate with capacitive loads typical of electroporation processes, as well as the quality of the output signal, enabling the design of

new electroporation treatments using high-voltage sinusoidal waveforms.

After the correct electrical performance was tested, the proposed converter was used in a proof of concept of a new ECT-based treatment [32]. This research was carried out at the Institute Gustave Roussy (UMR 8203-CNRS, Villejuif, France) following all the applicable ethical procedures (ethical evaluation approved by the CEEA 26, project number 2018\_014\_13409). The electric field pulses were locally applied to subcutaneous tumors in mice in combination with bleomycin. Stainless-steel parallel-plate electrodes were used (1 cm width, 1 mm thick and 4 cm long), interfaced with 2-m 5 kV-insulation wires to the developed generator. Besides, conductive gel (Asept Uni<sup>®</sup>Gel US, Aspet Inmed, France) was used to ensure correct electric field distribution. Different pulse durations, frequencies and amplitudes were assayed. FIGURE 10 (a) shows an example of the main waveforms during a single 5-ms 10-kHz sinusoidal burst ECT treatment. The correct generator operation as well as the evolution of the ECT treatment can be seen. As the electroporation process advances, the tissue conductivity increases as a result of increased tissue permeability, thus increasing the amplitude of the applied current. FIGURE 10 (b) shows an example of the experimental results several weeks after the treatment. As it can be seen, depending on the applied frequency, complete tumor regression can be achieved with sinusoidal waveforms. The complete set of in-vivo results is discussed in [32], together with additional electromagnetic analysis. The proof of concept showed less effectivity of the high frequency treatment at the same level of applied voltage, but more research is necessary to optimize the experimental parameters. These results are promising and highlight the potential of the proposed power converter for the research of future improved electroporation-based cancer treatments.

#### IV. CONCLUSIONS

This paper has proposed a GaN-based versatile waveform generator for biomedical applications. The proposed converter is based on an isolated multilevel structure featuring low-voltage GaN devices. Consequently, high output voltage can be achieved while operating at high frequency, enabling improved amplitude and temporal resolutions.

The proposed converter has been designed and implemented, following a 20-level structure operating at 1 MHz, with a maximum output voltage of 2000 V pp. After experimental results have proved the feasibility of this proposal, it has been applied to novel in-vivo electrochemotherapy treatments. The proposed converter has proved its correct operation as well as its effectivity as a research tool for future electroporation-based cancer treatments.

## REFERENCES

- [1] B. López-Alonso, A. Hernáez, H. Sarnago, A. Naval, A. Güemes, C. Junquera, J. M. Burdío, T. Castiella, E. Monleón, J. Gracia-Llanes, F. Burdío, E. Mejía, and O. Lucía, "Histopathological and ultrastructural changes after electroporation in pig liver using parallel-plate electrodes and high-performance generator," *Sci. Rep.*, vol. 9, no. 1, Dec. 2019, Art. no. 2647.
- [2] S. Schmidt, M. Schubler, C. Hessinger, C. Schuster, B. Bertulat, M. Kithil, M. C. Cardoso, and R. Jakoby, "Microwave induced electroporation of adherent mammalian cells at 18 GHz," *IEEE Access*, vol. 7, pp. 78698–78705, 2019.
- [3] O. Lucía, H. Sarnago, T. García-Sánchez, L. M. Mir, and J. M. Burdío, "Industrial electronics for biomedicine: A new cancer treatment using electroporation," *IEEE Ind. Electron. Mag.*, vol. 13, no. 4, pp. 6–18, Dec. 2019.
- [4] C. Y. Calvet, D. Famin, F. M. André, and L. M. Mir, "Electrochemotherapy with bleomycin induces hallmarks of immunogenic cell death in murine colon cancer cells," *OncolImmunology*, vol. 3, no. 4, Apr. 2014, Art. no. e28131.
- [5] D. Miklavčič, G. Serša, E. Breclj, J. Gehl, D. Soden, G. Bianchi, P. Ruggieri, C. R. Rossi, L. G. Campana, and T. Jarm, "Electrochemotherapy: Technological advancements for efficient electroporation-based treatment of internal tumors," *Med. Biol. Eng. Comput.*, vol. 50, no. 12, pp. 1213–1225, Dec. 2012.
- [6] L. M. Mir, S. Orlowski, J. Belehradek, and C. Paoletti, "Electrochemotherapy potentiation of antitumour effect of bleomycin by local electric pulses," *Eur. J. Cancer Clin. Oncol.*, vol. 27, no. 1, pp. 68–72, Jan. 1991.
- [7] E. Monleón, "Remodelling of liver tissue after irreversible electroporation in porcine," *Histol. Histopathol.*, vol. 34, no. S1, 2019.
- [8] P. Iruzubieta, "Ultrastructural study of pig liver regeneration following ablation with irreversible electroporation," *Histol. Histopathol.*, vol. 34, no. S1, 2019.
- [9] M. C. Junquera, T. Castiella, J. Gracia-Llanes, B. López-Alonso, A. Hernáez, L. García-Hernández, A. Güemes, E. Mejía, P. Iruzubieta, A. Naval, H. Sarnago, O. Lucía, and J. M. Burdío, "Electron microscope evaluation of irreversible electroporation on the liver in a porcine model," *Histol. Histopathol.*, vol. 32, no. 1, p. 125, 2017.
- [10] A. Ivorra and B. Rubinsky, "Historical review of irreversible electroporation in medicine," in *Irreversible Electroporation* (Series in Biomedical Engineering), B. Rubinsky, Ed. Berlin, Germany: Springer, 2010, pp. 1–21.
- [11] H. Sarnago, O. Lucía, A. Naval, J. M. Burdío, Q. Castellví, and A. Ivorra, "A versatile multilevel converter platform for cancer treatment using irreversible electroporation," *IEEE J. Emerg. Sel. Topics Power Electron.*, vol. 4, no. 1, pp. 236–242, Mar. 2016.
- [12] T. García-Sánchez, C. Merla, J. Fontaine, A. Muscat, and L. M. Mir, "Sine wave electroporation reveals the frequency-dependent response of the biological membranes," *Biochim. Biophys. Acta (BBA)-Biomembranes*, vol. 1860, no. 5, pp. 1022–1034, May 2018.
- [13] Q. Castellví, B. Mercadal, X. Moll, D. Fondevila, A. Andaluz, and A. Ivorra, "Avoiding neuromuscular stimulation in liver irreversible electroporation using radiofrequency electric fields," *Phys. Med. Biol.*, vol. 63, no. 3, Jan. 2018, Art. no. 035027.
- [14] H. Kim, A. B. Kozlyev, S.-J. Ho, and D. W. van der Weide, "Fourier synthesizer using left-handed transmission lines," in *IEEE MTT-S Int. Microw. Symp. Dig.*, Jun. 2005, p. 4.
- [15] P. Lei, Y. Mingtian, L. Geqi, Z. Qiaogen, and H. Kun, "A high voltage multi level arbitrary waveform generator for insulation testing," *IEEE Trans. Dielectr. Electr. Insul.*, vol. 26, no. 2, pp. 405–411, Apr. 2019.
- [16] F. A. Dragonas, G. Neretti, P. Sanjeev Kumar, and G. Grandi, "High-voltage high-frequency arbitrary waveform multilevel generator for DBD plasma actuators," *IEEE Trans. Ind. Appl.*, vol. 51, no. 4, pp. 3334–3342, Jul. 2015.
- [17] N. E. Flowers-Jacobs, S. B. Waltman, A. E. Fox, P. D. Dresselhaus, and S. P. Benz, "Josephson arbitrary waveform synthesizer with two layers of wilkinson dividers and an FIR filter," *IEEE Trans. Appl. Supercond.*, vol. 26, no. 6, pp. 1–7, Sep. 2016.
- [18] D. Puyal, C. Bernal, J. M. Burdío, J. Acero, and I. Millán, "Versatile high-frequency inverter module for large-signal inductive loads characterization up to 1.5 MHz and 7 kW," *IEEE Trans. Power Electron.*, vol. 23, no. 1, pp. 75–87, Jan. 2008.
- [19] X. She, A. Q. Huang, Ó. Lucía, and B. Ozpineci, "Review of silicon carbide power devices and their applications," *IEEE Trans. Ind. Electron.*, vol. 64, no. 10, pp. 8193–8205, Oct. 2017.
- [20] H. Sarnago, O. Lucía, and J. M. Burdío, "A comparative evaluation of SiC power devices for high-performance domestic induction heating," *IEEE Trans. Ind. Electron.*, vol. 62, no. 8, pp. 4795–4804, Aug. 2015.
- [21] O. Lucía, H. Sarnago, and J. M. Burdío, "Design of power converters for induction heating applications taking advantage of wide-bandgap semiconductors," *Int. J. Comput. Math. Electr. Electron. Eng.*, vol. 36, no. 2, pp. 483–488, Mar. 2017.
- [22] H. Sarnago, O. Lucía, A. Mediano, and J. M. Burdío, "Design and implementation of a high-efficiency multiple-output resonant converter for induction heating applications featuring wide bandgap devices," *IEEE Trans. Power Electron.*, vol. 29, no. 5, pp. 2539–2549, May 2014.
- [23] J. Rodriguez, J.-S. Lai, and F. Z. Peng, "Multilevel inverters: A survey of topologies, controls, and applications," *IEEE Trans. Ind. Electron.*, vol. 49, no. 4, pp. 724–738, Aug. 2002.
- [24] L. L. Rocha, J. F. Silva, and L. M. Redondo, "Multilevel high-voltage pulse generation based on a new modular solid-state switch," *IEEE Trans. Plasma Sci.*, vol. 42, no. 10, pp. 2956–2961, Oct. 2014.
- [25] L. L. Rocha, J. F. Silva, and L. M. Redondo, "Seven-level unipolar/bipolar pulsed power generator," *IEEE Trans. Plasma Sci.*, vol. 44, no. 10, pp. 2060–2064, Oct. 2016.
- [26] M. A. Elgenedy, A. Darwish, S. Ahmed, and B. W. Williams, "A modular multilevel-based high-voltage pulse generator for water disinfection applications," *IEEE Trans. Plasma Sci.*, vol. 44, no. 11, pp. 2893–2900, Nov. 2016.
- [27] A. A. Elserougi, A. M. Massoud, and S. Ahmed, "A modular high-voltage pulse-generator with sequential charging for water treatment applications," *IEEE Trans. Ind. Electron.*, vol. 63, no. 12, pp. 7898–7907, Dec. 2016.
- [28] A. A. Elserougi, I. Abdelsalam, A. M. Massoud, and S. Ahmed, "A full-bridge submodule-based modular unipolar/bipolar high-voltage pulse generator with sequential charging of capacitors," *IEEE Trans. Plasma Sci.*, vol. 45, no. 1, pp. 91–99, Jan. 2017.
- [29] A. Darwish, M. A. Elgenedy, S. J. Finney, B. W. Williams, and J. R. McDonald, "A step-up modular high-voltage pulse generator based on isolated input-parallel/output-series voltage-boosting modules and modular multilevel submodules," *IEEE Trans. Ind. Electron.*, vol. 66, no. 3, pp. 2207–2216, Mar. 2019.
- [30] M. A. Elgenedy, A. M. Massoud, S. Ahmed, and B. W. Williams, "A high-gain, high-voltage pulse generator using sequentially charged modular multilevel converter submodules, for water disinfection applications," *IEEE J. Emerg. Sel. Topics Power Electron.*, vol. 6, no. 3, pp. 1394–1406, Sep. 2018.
- [31] H. Sarnago, J. M. Burdío, T. García-Sánchez, L. M. Mir, and O. Lucía, "A versatile large-signal high-frequency arbitrary waveform generator using GaN devices," in *Proc. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Mar. 2019, pp. 458–462.
- [32] T. Garcia-Sanchez, B. Mercadal, M. Polrot, A. Muscat, H. Sarnago, O. Lucía, and L. M. Mir, "Successful tumor electrochemotherapy using sine waves," *IEEE Trans. Biomed. Eng.*, vol. 67, no. 4, pp. 1040–1049, Apr. 2020.



**HÉCTOR SARNAGO** (Senior Member, IEEE) received the M.Sc. degree in electrical engineering and the Ph.D. degree in power electronics from the University of Zaragoza, Spain, in 2010 and 2013, respectively.

He is currently a Senior Postdoctoral Researcher with the Department of Electronics Engineering and Communications, University of Zaragoza. His main research interests include resonant converters and digital control for induction heating applications. He is a member of the Aragon Institute for Engineering Research (I3A).



**JOSÉ M. BURDÍO** (Senior Member, IEEE) received the M.Sc. and Ph.D. degrees in electrical engineering from the University of Zaragoza, Zaragoza, Spain, in 1991 and 1995, respectively.

He has been with the Department of Electronics Engineering and Communications, University of Zaragoza, where he is currently a Professor, the Head of the Group of Power Electronics and Microelectronics, and the Director of the BSH Power Electronics Laboratory. In 2000, he was a

Visiting Professor with the Center for Power Electronics Systems, Virginia Tech. He has authored or coauthored more than 100 international journal articles and 250 papers in conference proceedings, and has been a co-inventor of more than 60 patents. His main research interests include the modeling of switching converters and resonant power conversion for induction heating and biomedical applications.

Dr. Burdío is a Senior Member of the Power Electronics, Industrial Electronics, and Engineering in Medicine and Biology Societies. He is also a member of the Aragon Institute for Engineering Research (I3A).



**TOMÁS GARCÍA-SÁNCHEZ** received the bachelor's degree in telecommunication engineering and the M.Sc. degree in biomedical engineering from the Universitat Politècnica de València, in 2010, and the Ph.D. degree in biomedical engineering from the Universitat Politècnica de Catalunya, Barcelona, Spain, in 2015. Afterward, he held a three-year postdoctoral position at the Gustave Roussy Institute, CNRS, Paris, France. Since March 2019, he has been a Postdoc-

toral Fellow of the Universitat Pompeu Fabra, Barcelona. In the last eight years, his research was focused on the study of bioelectric phenomena with a special emphasis on electroporation.



**LLUIS M. MIR** received the degree from the Ecole Normale Supérieure, Paris, and the D.Sc. degree from the University of Toulouse, in 1983. He is the Director (DRCE) of the Laboratory of Vectorology and Anticancer Therapies, CNRS (Gustave Roussy Institute, CNRS, and Université Paris-Saclay). He has coordinated three EU research projects during EU FP5 and FP6 and one MSCA recently. He has participated in an NoE (FP6) as well as in various EU COST actions.

He has published 232 peer-reviewed articles and 25 book chapters (h-index = 68, Web of Science), and delivered 662 presentations at international meetings and 94 invited lectures at institutions all over the world. He is a Fellow of the American Institute for Medical and Biological Engineering, the European Academy of Tumor Immunology, and the International Union of Radio Science (URSI), and the former President of the European Bioelectromagnetics Association, from 2011 to 2013.



**IGNACIO ÁLVAREZ-GARIBURO** received the B.Sc. and M.Sc. degrees in electrical engineering from the University of Zaragoza, Spain, in 2019, where he is currently pursuing the Ph.D. degree in versatile high-voltage generators. His main research interests include power electronics converters and digital control applied to high-voltage generators for industrial and biomedical applications.



**OSCAR LUCÍA** (Senior Member, IEEE) received the M.Sc. and Ph.D. degrees (Hons.) in electrical engineering from the University of Zaragoza, Spain, in 2006 and 2010, respectively.

From 2006 to 2007, he held a research internship at the Bosch and Siemens Home Appliances Group. Since 2008, he has been with the Department of Electronics Engineering and Communications, University of Zaragoza, where he is currently an Associate Professor. He was a

Visiting Scholar with the Center for Power Electronics Systems (CPES), Virginia Tech, in 2009 and 2012, and the TU Berlin, Germany, in 2019. In his research topics, he has published more than 75 international journal articles and 125 conference papers, and he has filed more than 40 international patents. His main research interests include resonant power conversion, wide-bandgap devices, and digital control, mainly applied to contactless energy transfer, induction heating, electric vehicles, and biomedical applications.

Dr. Lucía is a member of the Aragon Institute for Engineering Research (I3A). He is an active member of the Power Electronics (PELS) and Industrial Electronics (IES) Societies. He is currently an Associate Editor of the IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS, the IEEE TRANSACTIONS ON POWER ELECTRONICS, and the IEEE OPEN JOURNAL OF THE INDUSTRIAL ELECTRONICS SOCIETY.

...